


RO-We

Article-No. 451133-1243-XXX

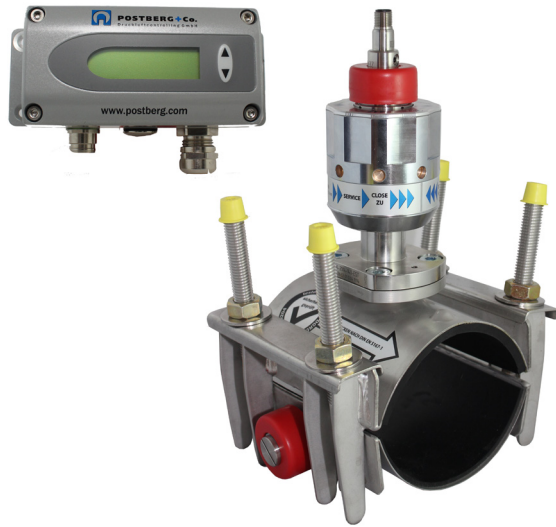

YOUR BENEFIT CHARACTERISTICS

- + Easy determination of compressed air consumption for main and distribution piping
- + High-end sensor with stainless steel mechanics
- + Cost-effective installation with TÜV-tested pipe clamp (no welding work necessary)
- + Quick sensor exchange without disconnection, thanks to patented changeover device
- + Suitable for steel pipes and stainless steel pipes
- + Inexpensive solution, in particular with large nominal widths

PRODUCTFINDER

Your industrial sector?

Food industry/ Chemical industry

What is to be measured?

Consumption Volume flow
24/7 sensor exchange

MEASURING POINT INTERFACE

Pipe clamp

Material: Stainless steel, Perbunan
Normal pressure: PN 16 (>DN200 PN10)
Pipe connection:
collar sealing

X

SENSOR UNIT WITH APPLICATOR

WA312e

Sensor: e-flow

Measuring range 0,5 to 200 m/s
Temp. -20 to 80°C

Material probe: stainless steel

Material applicator: stainless steel

X

MEDIUM

compressed air	Nitrogen	CO ₂	Oxygen	Helium	Argon
X	X	X	X	X	X

NORMAL WIDTHS

DN 15	DN 20	DN 25	DN 32	DN 40	DN 50	DN 65	DN 80	DN 100	DN 125	DN 150	DN 200	> DN 200
				X	X	X	X	X	X	X	X	X

TECHNICAL DATA

Measuring Point Interface

Stainless steel pipe clamp Rohrschelle with PB+CO® lock-blind plug

Sensor with applicator WA312e

Sensor e-flow with external display

Factory calibration and certificate (10-Punkt), ISO 50001 conform, certificate according to ISO/IEC 17025

Measuring range: 0,5 to 100 , 200 m/s on demand,

volume flow depending on nominal widths (see nominal widths datasheet)

Pressure resistance: 16 bar (optional 40 bar)

Display: External, 2-spaced with 6 digits

Response time t_{90} : < 1 sec.

Input delay: 0,5 sec.

Test port (analogue): apply voltage 0 - 10 V max. 1 mA; Power (3-conductor) 0 - 20 mA resp. 4 - 20 mA; $R_L < 500 \text{ Ohm}$

Test port (impulse): potential free for compressed air consumption in 1 impulse = $1 \text{ m}^3/10 \text{ m}^3$, impulse length: 0,02 - 2 sec

Switching output: potential free max 44 VDC, 500 mA

Bus interface: M-BUS (incl.) or MODBUS RTU (optional); Profibus or TCP/IP as external Bus-Modul (optional)

Digital interface: USB (for configuration)

Optional pressure compensation: 4 - 20 mA (2-wired; 15 V) for pressure sensor

Supply voltage: 18 - 30 V AC/DC

Power consumption: max. 200 mA (incl. display)

Temperature range: Ambiente temperature -20...60 °C; Medium temperatur -20...80 °C; Storage temperatur -20...60 °C

Humidity of gas: noncondensing

Cable connection: Feedthrough M16x1,5 (optional plug M12x1 8pol.)

Electromagnetic compatibility: EN61326-1, EN61326-2-3, industry environment

Material

Stainless steel, Perbunan (pipe clamp), Metal (AlSi3Cu) (case), Glas (Sensor probe) stainless steel (retracting valve)

Protection class case box: IP65 III

We like to support you with your projects for a successful compressed air controlling system.
Please visit us at www.postberg.com/efficiencyconsulting.

